

# STIC Translation Branch Request Form for Translation

Phone: 308-0881 Crystal Plaza ¼, Room 2C15 <http://ptoweb/patents/stic/stic-transhome.htm>

SPE Signature Required for RUSH

Information in shaded areas marked with an \* is required

Fill out a separate Request Form for each document

\*U. S. Serial No. : 9/926335

\*Requester's Name: Sharma Aminzay Phone No.: 305-8723

Office Location: PK2-2308 Art Unit/Org. : 2684

Is this for the Board of Patent Appeals? \_\_\_\_\_

Date of Request: 2-23-04

\*Date Needed By: 2-24-04

(Please indicate a specific date)

## Document Identification (Select One):

Note: If submitting a request for patent translation, it is not necessary to attach a copy of the document with the request.

If requesting a non-patent translation, please attach a complete, legible copy of the document to be translated to this form and submit it at your EIC or a STIC Library.

1. \_\_\_\_\_ Patent  
\*Document No. \_\_\_\_\_  
\*Country Code \_\_\_\_\_  
\*Publication Date \_\_\_\_\_  
\*Language \_\_\_\_\_  
No. of Pages \_\_\_\_\_ (filled by STIC)

2. \_\_\_\_\_ Article  
\*Author \_\_\_\_\_  
\*Language \_\_\_\_\_  
\*Country \_\_\_\_\_

3. \_\_\_\_\_ Other  
\*Type of Document \_\_\_\_\_  
\*Country \_\_\_\_\_  
\*Language \_\_\_\_\_

Translations Branch  
The world of foreign prior art to you.



To assist us in providing the most cost effective service, please answer these questions:

- Will you accept an English Language Equivalent? (Yes/No)
  - Would you like to review this document with a translator prior to having a complete written translation? (Translator will call you to set up a mutually convenient time) (Yes/No)
  - Would you like a Human Assisted Machine translation? (Yes/No)
- Human Assisted Machine translations provided by Derwent/Schreiber is the default for Japanese Patents 1993 onwards with an Average 5 day turnaround.

## STIC USE ONLY

### Copy/Search

Processor: \_\_\_\_\_  
Date assigned: \_\_\_\_\_  
Date filled: \_\_\_\_\_  
Equivalent found: (Yes/No) \_\_\_\_\_

Doc. No.: Equivalent  
Country: 1096711

### Translation

Date logged in: \_\_\_\_\_  
PTO estimated words: \_\_\_\_\_  
Number of pages: \_\_\_\_\_  
In-House Translation Available: \_\_\_\_\_

In-House  
Translator: \_\_\_\_\_  
Assigned: \_\_\_\_\_  
Returned: \_\_\_\_\_

Contractor:  
Name: \_\_\_\_\_  
Priority: \_\_\_\_\_  
Sent: \_\_\_\_\_  
Returned: \_\_\_\_\_



JAN 10 2002  
PATENT & TRADEMARK OFFICE

Form PTO 1449  
(Modified)

U.S. DEPARTMENT OF COMMERCE  
PATENT AND TRADEMARK OFFICE

ATTACHMENT NO.  
214935US2PCT

SERIAL NO.  
09/926,335

LIST OF REFERENCES CITED BY APPLICANT

APPLICANT  
Hiroyuki FUKADA

FILING DATE  
October 23, 2001

GROUP

U.S. PATENT DOCUMENTS

EXAMINER INITIAL		DOCUMENT NUMBER	DATE	NAME	CLASS	SUB CLASS	FILING DATE IF APPROPRIATE
	AA						
	AB						
	AC						
	AD						
	AE						
	AF						
	AG						
	AH						
	AI						
	AJ						
	AK						
	AL						
	AM						
	AN						

RECEIVED

AUG 16 2002

Technology Center 2600

FOREIGN PATENT DOCUMENTS

	DOCUMENT NUMBER	DATE	COUNTRY	TRANSLATION YES NO	
AO	WO 2000-02338	01/13/2000	WIPO		
AP	1225529	08/11/99	CHINA		
AQ	8-79161	03/22/96	JAPAN (submitting English Abstract only)		
AR	8-223108	08/30/96	JAPAN (with English Abstract)		X
AS	9-135215	05/20/97	JAPAN (with English Abstract)		X
AT	11-220774	08/10/99	JAPAN (with English Abstract)		X
AU	2000-22665	01/21/2000	JAPAN (with English Abstract)		X
AV					

OTHER REFERENCES (Including Author, Title, Date, Pertinent Pages, etc.)

	AW	
	AX	
	AY	
	AZ	

Examiner

Date Considered

\*Examiner: Initial if reference is considered, whether or not citation is in conformance with MPEP 609; Draw line through citation if not in conformance and not considered. Include copy of this form with next communication to applicant.

172  
English Abstract

1/3/2 (Item 1 from file: 351)  
DIALOG(R) File 351:Derwent WPI  
(c) 2004 Thomson Derwent. All rts. reserv.

013033469 \*\*Image available\*\*

WPI Acc No: 2000-205320/200018

XRPX Acc No: N00-152811

Code division multiple access receiving method for mobile communication  
terminal using rake synthesis

Patent Assignee: NEC CORP (NIDE )

Inventor: OGINO T

Number of Countries: 022 Number of Patents: 006

Patent Family:

Patent No	Kind	Date	Applicat No	Kind	Date	Week	
WO 200002338	A1	20000113	WO 99JP3336	A	19990623	200018	B
JP 2000022665	A	20000121	JP 98189374	A	19980703	200018	
AU 9943919	A	20000124	AU 9943919	A	19990623	200027	
EP 1096711	A1	20010502	EP 99926763	A	19990623	200125	
			WO 99JP3336	A	19990623		
CN 1315091	A	20010926	CN 99810102	A	19990623	200206	
AU 760919	B	20030522	AU 9943919	A	19990623	200338	

encl

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP99/03336

A. CLASSIFICATION OF SUBJECT MATTER  
Int.Cl.<sup>6</sup> H04J13/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

Int.Cl.<sup>6</sup> H04J13/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Jitsuyo Shinan Koho (Y1, Y2) 1926-1999 Toroku Jitsuyo Shinan Koho (U) 1994-1999  
 Kokai Jitsuyo Shinan Koho (U) 1971-1999 Jitsuyo Shinan Toroku Koho (Y2) 1996-1999

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP, 9-321664, A (Matsushita Electric Industrial Co., Ltd.), 12 December, 1997 (12. 12. 97), Fig. 1 (Family: none)	1-6, 8, 18, 19, 21, 22, 35-37
A	JP, 9-181704, A (NTT Mobile Communications Network Inc.), 11 July, 1997 (11. 07. 97), Fig. 3 (Family: none)	7, 9-17, 20, 23-34, 38, 39

☐ Further documents are listed in the continuation of Box C.☐ See patent family annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"Z" document member of the same patent family

Date of the actual completion of the international search  
21 September, 1999 (21. 09. 99)Date of mailing of the international search report  
5 October, 1999 (05. 10. 99)Name and mailing address of the ISA/  
Japanese Patent Office

Authorized officer

Facsimile No.

Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)

Palm → WIPO

世界知的所有権機関  
国際事務局



PCT

特許協力条約に基づいて公開された国際出願

<p>(51) 国際特許分類6 H04J 13/00</p>	<p>A1</p>	<p>(11) 国際公開番号 W000/02338</p> <p>(43) 国際公開日 2000年1月13日(13.01.00)</p>
<p>(21) 国際出願番号 PCT/JP99/03336</p> <p>(22) 国際出願日 1999年6月23日(23.06.99)</p> <p>(30) 優先権データ 特願平10/189374 1998年7月3日(03.07.98) JP</p> <p>(71) 出願人 (米国を除くすべての指定国について) 日本電気株式会社(NEC CORPORATION)[JP/JP] 〒108-8001 東京都港区芝五丁目7番1号 Tokyo, (JP)</p> <p>(72) 発明者; および (75) 発明者/出願人 (米国についてのみ) 荻野 透(OGINO, Tooru)[JP/JP] 〒108-8001 東京都港区芝五丁目7番1号 日本電気株式会社内 Tokyo, (JP)</p> <p>(74) 代理人 若林 忠, 外(WAKABAYASHI, Tadashi et al.) 〒107-0052 東京都港区赤坂1丁目9番20号 第16興和ビル8階 Tokyo, (JP)</p>		<p>(81) 指定国 AU, CN, US, 欧州特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE)</p> <p>添付公開書類 国際調査報告書</p>
<p>(54) Title: CDMA RECEIVING METHOD AND CIRCUIT</p> <p>(54) 発明の名称 CDMA受信方法及び受信回路</p> <p>(57) Abstract</p> <p>A receiving method at a mobile terminal comprising performing communication by a code division multiple access (CDMA) using a spectrum diffusion, executing an arrival radio wave search for detecting radio waves from transmission lines with different delay times and synthesizing receiving signals from radio waves from different transmission lines using a rake synthesis, wherein, when a detected receiving status of a receiving signal satisfies a preset condition, a range of delay times for executing an arrival radio wave search is changed. For example, when a phasing pitch is used as a variation of a received electric field, a reciprocal of a phasing pitch is compared with a preset threshold value or a moving speed of a mobile terminal calculated from a phasing pitch is compared with the threshold value and, if the threshold value is smaller, a peak search is performed only in the vicinity of the peak determined by the previous search.</p> <div data-bbox="808 1255 1372 1585"> </div> <div data-bbox="893 1612 1372 1927"> <p>101 ... RECEIVING RF UNIT</p> <p>102 ... BASE BAND RECEIVING UNIT</p> <p>103 ... ARRIVAL RADIO WAVE SEARCH CIRCUIT</p> <p>104 ... POWER SYNTHESIS UNIT</p> <p>106 ... RECEIVED VOICE PROCESSING UNIT</p> <p>111 ... TRANSMITTING VOICE PROCESSING UNIT</p> <p>112 ... ELECTRIC FIELD INTENSITY MEASURING UNIT</p> <p>113 ... BASE BAND TRANSMITTING UNIT</p> <p>114 ... TRANSMITTING RF UNIT</p> </div>		


## INTERNATIONAL SEARCH REPORT

International application No.

PCT/JP99/03336

<b>A. CLASSIFICATION OF SUBJECT MATTER</b> Int.Cl <sup>6</sup> H04J13/00 According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b> Minimum documentation searched (classification system followed by classification symbols) Int.Cl <sup>6</sup> H04J13/00 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Jitsuyo Shinan Koho (Y1, Y2) 1926-1999 Toroku Jitsuyo Shinan Koho (U) 1994-1999 Kokai Jitsuyo Shinan Koho (U) 1971-1999 Jitsuyo Shinan Toroku Koho (Y2) 1996-1999 Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP, 9-321664, A (Matsushita Electric Industrial Co., Ltd.), 12 December, 1997 (12. 12. 97), Fig. 1 (Family: none)	1-6, 8, 18, 19, 21, 22, 35-37
A	JP, 9-181704, A (NTT Mobile Communications Network Inc.), 11 July, 1997 (11. 07. 97), Fig. 3 (Family: none)	7, 9-17, 20, 23-34, 38, 39
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "E" earlier document but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search 21 September, 1999 (21. 09. 99)		Date of mailing of the international search report 5 October, 1999 (05. 10. 99)
Name and mailing address of the ISA/ Japanese Patent Office		Authorized officer
Facsimile No.		Telephone No.

Form PCT/ISA/210 (second sheet) (July 1992)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 1 096 711 A1

(12) **EUROPEAN PATENT APPLICATION**  
published in accordance with Art. 158(3) EPC

(43) Date of publication:  
02.05.2001 Bulletin 2001/18

(51) Int. Cl.<sup>7</sup>: H04J 13/00

(21) Application number: 99926763.6

(86) International application number:  
PCT/JP99/03336

(22) Date of filing: 23.06.1999

(87) International publication number:  
WO 00/02338 (13.01.2000 Gazette 2000/02)

(84) Designated Contracting States:  
DE FR GB IT

(72) Inventor: Ogino, Tooru  
Minato-ku, Tokyo 108-8001 (JP)

(30) Priority: 03.07.1998 JP 18937498

(74) Representative:  
VOSSIUS & PARTNER  
Siebertstrasse 4  
81675 München (DE)

(71) Applicant: NEC Corporation  
Minato-ku, Tokyo 108-8001 (JP)

(54) **CDMA RECEIVING METHOD AND CIRCUIT**

(57) A Code Division Multiple Access (CDMA) reception method in a mobile terminal uses a spread spectrum to realize communication, performs a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths. The reception state of the received signals is detected, and when the reception state meets a prescribed condition, the range of delay time in which a search of arrived radiowaves is performed is modified. In a case in which the fading

pitch is used as the amount of fluctuation of the received electric field, for example, the reciprocal of the fading pitch is compared with a prescribed threshold value, or the speed of movement of the mobile terminal is first calculated from the fading pitch and this speed of movement is compared with a threshold value, and when the threshold value is smaller, a peak search is performed only in the vicinities of peaks found in the preceding search.


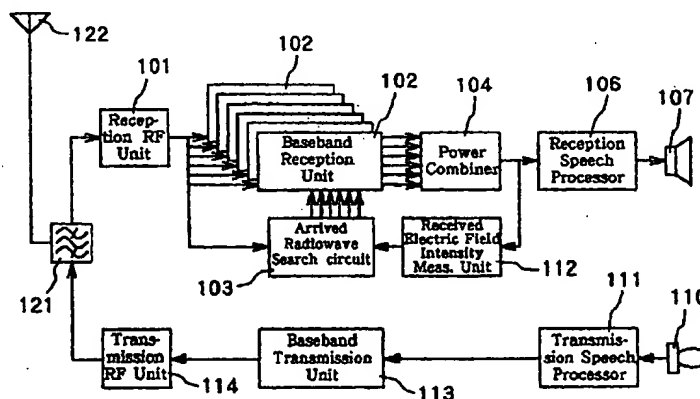


FIG. 6

EP 1 096 711 A1



## Description

### Technical Field:

[0001] The present invention relates to a reception method and reception circuit in a wireless communication system employing CDMA (Code Division Multiple Access), and in particular, to a reception method and reception circuit that employ a RAKE combining receiver.

### Background Art:

[0002] CDMA is one multiple access technique in wireless communication systems. The application of CDMA in a mobile communication system made up by a base station and a plurality of mobile communication terminals has the advantages of both allowing an increase in the number of terminals that can be accommodated by the system and a reduction of the transmission power.

[0003] Spread-spectrum modulation is generally used in communication systems that employ CDMA. In communication by spread-spectrum modulation, the transmission signals are subjected to spreading modulation using a PN (Pseudo-random Number) code as a spreading code on the transmitting side to spread the spectrum of transmission signals, and these signals are then sent to the receiving side. On the receiving side, the demodulated transmission signals are obtained by establishing synchronization and then subjecting the received signals that have a spread spectrum to despreading using the same PN code as was used on the transmission side. This PN code that is the same as was used on the transmission side is referred to as the "spreading code replica."

[0004] Although direct sequence is used as the method of spread-spectrum modulation in the following explanation, the same discussion holds true if a frequency-hopping spread modulation or the like is employed.

[0005] Radio waves that arrive at a receiving station from a transmitting station include, in addition to direct waves, i.e., the component that is propagated directly from the transmitting station to the receiving station, components that are reflected by, for example, mountains, the ground surface, and buildings, and reach the receiver by different propagation paths. The number of radiowave components that pass over different paths are equal in number to the different propagation paths, and the time for each radiowave component to arrive at the receiving station differs according to the length of path taken to arrive at the receiving station. These radiowave components that pass over different paths are referred to as the multipath components. Collecting and combining these different radiowaves having different arrival times while giving each a delay time according to the time to arrive would allow addition of these signals

to the received signal of the direct wave, thereby enabling a larger received signal than for the direct wave alone, an improvement in S/N (signal-to-noise ratio), and with this improvement in S/N ratio, a reduction in transmission power.

[0006] The direction of arrival of a radiowave component as seen from the receiver differs for each propagation path, and the technique of increasing reception sensitivity by receiving and combining radiowaves that arrive from many directions is called RAKE combining because a visual representation would be similar to a rake.

[0007] Fig. 1 is a block diagram showing the configuration of a conventional receiver used in a CDMA communication system that employs RAKE combining, i.e., a RAKE receiver. Although here referred to as a receiver, this is actually a mobile terminal that communicates with a base station in a CDMA mobile communication system.

[0008] This receiver is provided with: antenna 222, transmission/reception filter 221 connected to antenna 222 for separating transmission signals and received signals; reception radio-frequency unit 201 connected to the receiving-side port of transmission/reception filter 221 for amplifying and frequency-converting radio-frequency received signals received at antenna 222 and converting it to received signals on the baseband; a plurality of baseband reception units 202 that receive baseband received signals in parallel from reception radio-frequency unit 201 and perform despreading of received signals using a prescribed PN code; power combiner 204 that combines signals after despreading that are outputted from each of baseband reception units 202; reception speech processor 206 for decoding the combined signal to a speech signal; ear receiver 207 for outputting speech after processing; and arrived radiowave search circuit 203 that performs a search of arrived radiowaves of each propagation component for carrying out RAKE combination and that reports the timing of despreading for each of baseband reception units 202. The example shown in the figure is provided with six baseband reception units 202. In this case, reception radio-frequency unit 201, baseband reception units 202, arrived radiowave search unit 203, power combiner 204, reception speech processor 206, and ear receiver 207 constitute a reception unit. This receiver is further provided with a transmission unit that is made up of: microphone 210 that converts input speech to an electronic signal (speech signal), transmission speech processor 211 that encodes the speech signal that is outputted from microphone 210, baseband transmission processor 213 that spread-modulates the encoded signal by a prescribed PN code and converts it into baseband transmission signals; and transmission radio-frequency unit 214 that converts baseband transmission signals to radio-frequency transmission signals. The output of transmission radio-frequency unit 214, i.e., radio-frequency transmission signals, are applied to



the transmission-side port of transmission/reception filter 221.

**[0009]** Since the arrival times of radiowaves differ for differing propagation paths, the receiver shown in Fig. 1 not only has a plurality of baseband reception units 202 for despreading the baseband signals, but uses arrived radiowave search circuit 203 to find the arrival time of each component having a different propagation path. Arrived radiowave search circuit 203 then reports the arrival time (delay time) of the radiowave component of each propagation path to a respective baseband reception unit 202, and each baseband reception unit 202 carries out despreading of the received radiowaves while shifting the timing of the PN code in accordance with the reported arrival time. Since the timing of the PN code is shifted according to the arrival times, the signals that are outputted from each of baseband reception units 202 after despreading have matched phase, and combination of the power of these signals at power combiner 204 enables a larger received signal. In a RAKE receiver, the component that carries out despreading for each arrival time is called a "finger." The above-described RAKE receiver has six baseband reception units 202, and thus has six fingers.

**[0010]** The chip rate of the PN code that is used for spread modulation on the transmission side and despreading on the receiving side may be, for example, 4 MHz, in which case the time per chip is 0.25  $\mu$ s. In contrast, the difference in arrival times of the multipath components may reach several tens of microseconds. Fig. 2 is a graph showing the relation between the delay times (the amount of shift in chip phase) and the received power after despreading if the chip phase of the PN code used in despreading is shifted by degrees, for example, by 1/4 chip, in an environment in which the radiowaves on different propagation paths are received at the same time. This graph is called a delay profile.

**[0011]** Since radiowaves that arrive from a transmission station by different propagation paths will have different arrival times, peaks will occur in the received power at different delay times. The example shown in the figure has three peaks, peak #1, peak #2, and peak #3, and the spacing of these three peaks corresponds to the difference in arrival times. Arrived radiowave search circuit 203 searches for the positions of these peaks and assigns one peak to each of baseband reception units 202. The search for the positions of peaks in this case is equivalent to finding differences in arrival times. In each of baseband reception units 202, the radiowave component that has arrived by the propagation path that corresponds to the assigned peak undergoes despreading by carrying out despreading of the received signal by the PN code of the chip phase that corresponds to the assigned peak position. In this way, the received signals of the radiowave components of each of the different propagation paths undergo appropriate despreading at each baseband reception unit, and the despread received signals are power-com-

bined to enable an increase in the intensity of the received signal and an improvement in the S/N.

**[0012]** Fig. 3 is a block diagram showing an example of the configuration of the arrived radiowave search circuit in the conventional RAKE receiver. This arrived radiowave search circuit is provided with: despreading unit 231 that is given a PN code and that performs despreading of received signals based on the PN code; integrator 232 that integrates the output signal from despreading unit 231 over the time interval of one symbol and integrates over a still longer period; dual-port RAM (DPRAM) that stores the output values of integrator 232; searcher circuit 235 that searches inside dual-port RAM, detects peaks for each delay time, and assigns peak positions for each of baseband reception units 202; PN code generator 236 that generates the PN code; and control unit 237 that both controls the phase of the PN code that is generated by PN code generator 236 and controls the write addresses of dual-port RAM 234. The despreading of received signals is then performed in despreading unit 231 while shifting the phase of the PN code that is generated at PN code generator 236 by increments of, for example, 1/4 chip; the output from despreading unit 231 is integrated at integrator 232; and the value of the integration result is stored in dual-port RAM 234 in correspondence with the phase of the PN code at that time. A delay profile such as is shown in Fig. 2 is thus stored in dual-port RAM 234. Searcher circuit 235 searches inside this dual-port RAM 234, determines a peak position that is to be assigned to each of baseband reception units 202, and reports to each baseband reception units 202 an arrival time difference that corresponds to a determined peak position.

**[0013]** In a mobile communication system such as an automobile telephone system or portable telephone system, at least one of a transmission station and receiving station can be assumed to be moving, thereby causing the propagation paths of radiowaves between the transmission station and receiving station to change minute to minute and the positions of peaks that correspond to propagation paths to also change as a result. In some cases, a propagation path may disappear and the associated peak may vanish, or a new propagation path may occur and a new peak also appear as a result. In particular, a delay profile may change abruptly when a mobile unit is moving at high speed, and the peaks of arrived radiowaves must constantly be searched to prevent loss of the peak positions.

**[0014]** As an example, Japanese Patent Laid-open No. 181704/97 (JP, 09181704,A) discloses a multipath search method and CDMA signal receiver that can follow changes in the delay profile of a CDMA signal and perform RAKE combination of a plurality of propagation paths. In this method, a receiver is used that includes a search finger and tracking fingers that are similar to the above-described baseband reception unit. As shown in Fig. 4, the levels of received signal are detected at all

chip phases by the search finger in Step S1 as the initial operation. Based on the mean received signal level that is detected in this initial search, paths that are to undergo RAKE combining are selected in Step S2, and the phases of these selected paths are detected using the tracking fingers. After performing integration and damping, demodulation is performed for each path, following which RAKE combining is carried out. Each tracking finger has the function of independently tracking each path. When paths overlap, i.e., when the same peak is assigned to tracking fingers, a selected path is reassigned to one tracking finger based on ranking information of the received signal levels in Step S4. On the other hand, the search finger shown in Step S3 detects the received signal levels for all chip phases of the range of delay times that are to undergo RAKE combining. An average is taken for each chip phase and RAKE combining paths are selected at a fixed period, and a corresponding spreading code replica code (PN code) is then given to each tracking finger.

**[0015]** Fig. 5 is a block diagram showing the configuration of the CDMA signal receiver disclosed in the above-described Japanese Patent Laid-open No. 181704/97. This receiver is provided with a plurality of tracking fingers 300, search finger 350, long code spreading code replica generator 381 that generates a PN code, RAKE combining path selector 382 for selecting paths that are to undergo RAKE combining; detectors 383 that each perform absolute synchronous detection of the output of a respective tracking finger 300; and RAKE combining circuit 385 that performs RAKE combining of the output of each detector 383 and outputs as an output signal. A received input spread signal is supplied to each tracking finger 300 and search finger 350.

**[0016]** Since each tracking finger 300 is provided with an independent tracking function as described in the foregoing explanation, two sets of multipliers 301 and 302 and integration-damping circuits 304 and 305 are provided for tracking in addition to multiplier 303 and integration-damping circuit 307 that are provided for signal reception. Multipliers 301 to 303 are for multiplying a PN code with a received input spreading signal and performing despreading, and integration-damping circuits 304, 305, and 307 are for integrating the outputs of multipliers 301 to 303 at fixed time intervals. Amplitude squaring circuits 308 and 309 are provided for squaring each of the outputs (amplitudes) of integration-damping circuits 304 and 305 for tracking. In addition, each tracking finger 300 is provided with: subtractor 310 for calculating the difference in outputs of amplitude squaring circuit 308 and 309; loop filter 311 for receiving the outputs of subtractor 310; spread code replica timing control signal generator 312 for determining the amount of delay (timing) of the PN code based on the output of loop filter 311; and spreading code replica delay unit 306 for giving a delay, for each of multipliers 301 to 303, to a PN code from long code spreading code replica

generator 381 based on control signals from spreading code replica timing control signal generator 312 and outputting to these multipliers 301 to 303.

**[0017]** Search finger 350 is provided with: multiplier 351 for multiplying the received input spreading signal with the PN code; integration-damping circuit 352 for integrating the output of multiplier 351 at fixed intervals; amplitude squaring circuit 353 for calculating the square of the output (amplitude) of integration-damping circuit 352; reception level memory 354 for storing the delay profile based on the output of amplitude squaring circuit 353; and spreading code replica delay unit 355 for giving a delay to the PN code from long code spreading code replica generator 381 and supplying the delayed PN code to multiplier 351.

**[0018]** As described hereinabove, the delay profile of the received signals must be obtained and the peak positions detected when performing RAKE reception in a mobile communication system. In the case of the circuit shown in Fig. 1, the arrived radiowave search circuit must continue to search for peaks over the entire conceivable range of variation of arrival time differences for each multipath component, and current is therefore constantly consumed. Similarly, in the case of the signal receiver described in Japanese Patent Laid-open No. 181704/97, not only must the search finger be operated constantly, but the circuits for tracking at each tracking finger must also be constantly operated, and the consumed current therefore increases accordingly. In a receiver that performs RAKE combining, the circuits that follow output of the reception radio-frequency unit are typically configured to perform digital signal processing, and the computation load of the integrating process for the peak search is greater than for the integration process for despreading of normal signals and therefore consumes proportionally more power. Moreover, the process of searching dual-port RAM or received level memory to find peak positions entails a process of step-by-step comparison of the data inside this memory and this also leads to greater power consumption.

#### Disclosure of the Invention:

**[0019]** A search of arrived radiowaves that is performed by the conventional method to realize RAKE reception as described hereinabove results in a high level of power consumption, and in particular, raises the problem of reducing the possible talk time of a mobile terminal that presupposes the use of a battery drive, i.e., in an automobile telephone terminal or portable telephone terminal.

**[0020]** It is therefore a first object of the present invention to provide a reception method that can shorten the time of operation of an arrived radiowave search circuit in a mobile terminal that performs RAKE combining and thus reduce consumption of current.

**[0021]** It is a second object of the present invention to provide a reception circuit that can shorten the time of

operation of an arrived radiowave search circuit in a mobile terminal that performs RAKE combining and thus reduce consumption of current.

**[0022]** The first object of the present invention is achieved by a reception method in a mobile terminal that realizes communication by Code Division Multiple Access (CDMA) using a spread spectrum, that performs a search of arrived radiowaves to detect radiowaves of propagation paths having different delay times, and that uses RAKE combining to combine received signals from radiowaves of different propagation paths; wherein the reception method is a CDMA reception method comprising the steps of detecting the reception state of received signals, and changing the range of delay time in which a search of arrived radiowaves is performed when the reception state satisfies a prescribed condition.

**[0023]** The first object of the present invention is also achieved by a reception method in a mobile terminal that realizes communication by Code Division Multiple Access (CDMA) using a spread spectrum, that performs a search of arrived radiowaves to detect the radiowaves of propagation paths having different delay times, and that uses RAKE combining to combine received signals from radiowaves of different propagation paths; wherein the reception method is a CDMA reception method comprising the steps of detecting the amount of fluctuation in the received electric field of the received signals, and changing the range of delay time in which a search of arrived radiowaves is performed when the amount of fluctuation satisfies a prescribed condition.

**[0024]** In the CDMA reception method according to the present invention, the amount of fluctuation in the received electric field is typically the fading pitch or fading depth. In addition, a method can be proposed as the method of limiting the range of delay time in which, for example, the reciprocal of the fading pitch is compared with a prescribed threshold value, or the speed of movement of the mobile terminal is calculated from the fading pitch and this speed of movement is compared with a threshold value, and if the threshold value is smaller, a peak search is carried out only in, for example, the vicinities of previously found peaks, i.e., the vicinities of peaks found in a previous search.

**[0025]** The second object of the present invention is realized by a CDMA reception circuit, which is a reception circuit in a mobile terminal that realizes communication by Code Division Multiple Access (CDMA) using a spread spectrum and that uses RAKE combining to combine received signals from radiowaves of different propagation paths; that comprises: baseband reception means that performs despreading of received signals, electric field intensity measurement means that detects the amount of fluctuation in the received electric field, and an arrived radiowave search circuit that performs a search of arrived radiowaves that detects the radiowaves of propagation paths of different delay times and

assigns radiowaves of different propagation paths to respective baseband reception means; and in which the range of delay times of the search of arrived radiowaves that is performed by the arrived radiowave search circuit is modified when the amount of fluctuation satisfies a prescribed condition.

**[0026]** In the CDMA reception circuit of this present invention, the baseband reception means is typically made up from a plurality of baseband reception units required for RAKE reception, i.e., a plurality of fingers.

**[0027]** The delay time of a radiowave on each propagation path changes with movement of the mobile terminal, but it can be assumed that change in the arrival times will be higher at high speeds of movement, and lower at low movement speeds. When the change in the arrival time is low, peaks should be searched only in the vicinities of previously found arrival times, and there is no need for the arrived radiowave search circuit to continue to search for peaks over the entire conceivable range of change in chip phase. Alternatively, the search for arrived radiowaves can be performed intermittently.

**[0028]** In the case of a mobile terminal, fading is observed with movement. The time interval between troughs in the received electric field due to fading is referred to as fading pitch, and fading pitch is dependent on the speed of movement of the mobile terminal. In the present invention, the fading pitch is measured, and this measured fading pitch is compared with a prescribed threshold value, or the speed of movement that is estimated from the measured fading pitch is compared with a prescribed threshold value. The speed of movement of the mobile terminal is determined to be low if the threshold value falls below the fading pitch (in other words, if the threshold value is greater than the reciprocal of the fading pitch), or if the threshold value is greater than the speed of movement. If the speed is determined to be low, the search of arrived radiowaves is performed only in the vicinities of previously found arrival times for each propagation path. This configuration allows the arrived radiowave search circuit to be operated intermittently and can realize a reduction in the power consumption of the entire mobile terminal. Instead of determining if the speed of movement of the mobile terminal is high or low from the fading pitch, the present invention also allows determining whether fading is observable or not. If there is no fading, it can then be determined that the mobile terminal is actually not moving, i.e., is stationary, and in this case the search range of the arrived radiowave search circuit can be drastically limited to realize a still greater reduction in power consumption. In this case, the absence of fading means that, for example, fading is substantially not observable.

## Brief Description of Drawings:

[0029]

Fig. 1 is a block diagram showing the construction of a conventional receiver that employs RAKE combining and that is used in a CDMA communication system.

Fig. 2 is a graph showing the relation between the amount of delay in a PN code and the received power.

Fig. 3 is a block diagram showing an example of the construction of an arrival time search circuit in the conventional receiver.

Fig. 4 shows the procedures of a multipath search method of the prior art that allows RAKE combination of a plurality of paths.

Fig. 5 is a block diagram showing the construction of a CDMA signal receiver of the prior art that operates in accordance with the multipath search method shown in Fig. 4.

Fig. 6 is a block diagram showing the construction of a receiver according to the basic embodiment of the present invention.

Fig. 7 is a block diagram showing an example of the construction of the arrived radiowave search circuit.

Fig. 8 is a graph showing an example of the change over time of the received electric field intensity due to fading.

Fig. 9 is a graph showing the relation between the amount of delay of the PN code and the received power, and the search range of the arrived radiowave search circuit.

Fig. 10 is a flow chart for explaining the operation of the receiver shown in Fig. 6.

Fig. 11 is a view for explaining the principles of setting the threshold value.

Fig. 12 is a graph showing another example of the change over time of the received electric field intensity due to fading.

Fig. 13 is a graph for explaining a case in which hysteresis is set in the threshold value.

Fig. 14 is a graph for explaining a case in which the search range is switched over three levels and hysteresis is set in the threshold values.

Fig. 15 is a graph showing the relation between the amount of delay of the PN code and received power, and the search range of arrived radiowave search circuit in a case in which the search range is switched over three levels.

Fig. 16 is a block diagram showing the construction of a receiver according to another embodiment of the present invention.

Fig. 17 is a flow chart for explaining the operation of the receiver shown in Fig. 16.

## Best Mode for Carrying Out the Invention:

[0030] Referring now to the figures, preferable embodiments of the present invention are next explained.

[0031] First, regarding the basic embodiment of the present invention will be explained. Fig. 6 is a block diagram showing the construction of a receiver in this embodiment. This receiver uses RAKE combining and is employed in a CDMA communication system. Although referred to as a receiver here, this unit is actually a mobile terminal in a CDMA mobile communication system and communicates with a base station. In concrete terms, this unit is constituted by, for example, a portable telephone.

[0032] This receiver is provided with: antenna 22; transmission/reception filter 121 that is connected to antenna 122 for separating transmission signals and received signals; reception radio-frequency unit 101 that is connected to the reception-side port of transmission/reception filter 121 and that amplifies and frequency-converts radio-frequency received signals received at antenna 122 to convert these signals to received signals on the baseband; a plurality of baseband reception units 102 that receive received baseband signals in parallel from reception radio-frequency unit 101 and that perform despreading of the received signals using a prescribed PN code; power combiner 104 that combines signals after despreading that are outputted from each of baseband reception units 102; reception speech processor 106 that decodes the combined signal to a speech signal; ear receiver 107 that outputs speech after processing; arrived radiowave search circuit 103 that performs a search of arrived radiowaves for RAKE combining, detects peaks of each propagation component of differing delay time, and reports a despreading timing to each baseband reception unit 102; and electric field intensity measurement unit 112 that measures the intensity of the received electric field based on signals outputted from power combiner 104 for detecting fading pitch. In the example shown in the figure, six baseband reception units 102 are provided, i.e., the RAKE receiver has six fingers. In this case, reception radio-frequency unit 101, baseband reception units 102, arrived radiowave search circuit 103, power combiner 104, reception speech processor 106, ear receiver 107, and received electric field measurement unit 112 make up the reception unit.

[0033] This receiver is further provided with a transmission unit that is made up by: microphone 110 that converts input speech to electrical signals (speech signals); transmission speech processor 111 that encodes the speech signal that is outputted from microphone 110; baseband transmission unit 113 that spread-modulates the encoded signal by a prescribed PN code and converts it to a baseband transmission signal; and transmission radio-frequency unit 114 that converts the baseband transmission signal to a radio-frequency

transmission signal. The output of transmission radio-frequency unit 114, i.e., the radio-frequency transmission signal, is applied to the transmission-side port of transmission/reception filter 121.

**[0034]** Since the arrival times of radiowaves of different propagation paths differ, a plurality of baseband reception units (fingers) 102 are provided for despread-  
ing the baseband signals for each propagation path, and further, the arrival time of each component having a different propagation path is found by arrived radiowave search circuit 103. Each of baseband reception units 102 performs despread-  
ing of received radiowaves while shifting the chip phase, i.e., the timing of the PN code, in accordance with the arrival times that are detected by arrived radiowave search circuit 103. In this way, the despread signals that are outputted from baseband reception units 102 are power-combined in power combiner 104 to obtain a large received signal.

**[0035]** Fig. 6 is a block diagram showing an example of the construction of arrival time search circuit 103. This arrived radiowave search circuit 103 is provided with: despread-  
ing unit 131 that is given a PN code and performs despread-  
ing of a received signal based on this PN code; integrator 132 that integrates the signal outputted from despread-  
ing unit 131 over the time interval of one symbol and then integrates this integration result over a still longer time interval; dual-port RAM (DPRAM) 134 that stores the output value of integrator 132; searcher circuit 135 that searches inside dual-port RAM 134, detects peaks for each delay time, and assigns a peak position for each of baseband reception units 102; PN code generator 136 that generates PN codes; and control unit 137 that performs overall control of arrival time search circuit 103. As will be described hereinbelow, the speed of movement of the mobile unit that incorporates this receiver is estimated in this receiver by electric field intensity measurement unit 112, and control unit 137 receives information from electric field intensity measurement unit 112 regarding whether mobile unit is moving at a high speed. More specifically, control unit 137 not only controls the phase of the PN code that is generated by PN code generator 136 and controls the addresses when writing to dual-port RAM 134, but also determines the range of the peak search that is performed by arrival time search circuit 103 based on the information from electric field intensity measurement unit 112 and determines the timing of the operation of arrival radiowave time search circuit 103.

**[0036]** When a peak search is performed, the despread-  
ing of the received signal is carried out at despread-  
ing unit 131 while shifting the phase of the PN code that is generated by PN code generator 136 in increments of, for example, 1/4 chip, as in the arrived radiowave search circuit (see Fig. 3) in the receiver of the prior art. This output is integrated by integrator 132, and the integration result is stored in dual-port RAM 134. If the range of the peak search is limited at this time, peak search is performed only within this limited

range. Since the speed of shifting the PN code is fixed, the peak search is performed intermittently when the range of the peak search is limited, as compared with a case in which the peak search is executed across the entire range.

**[0037]** A delay profile is stored in dual-port RAM 134 by the above-described process, whereby searcher circuit 135 searches inside dual-port RAM 234, determines the peak positions that are to be assigned to respective baseband reception units 102, and reports the arrival time differences that correspond to the determined peak positions to each of baseband reception units 102.

**[0038]** In this receiver, electric field intensity measurement unit 112 measures the intensity of the received electric field and detects the fall in received electric field that is brought about by fading. This receiver, which is a mobile terminal, undergoes fading according to the speed of its movement, the arrival times varying for each propagation path. Fig. 8 is a graph showing an example of the variation in received electric field intensity that is caused by fading. The time intervals between the minimal points (troughs) in the received electric field intensity caused by fading are referred to as the "fading pitch." The change in received electric field intensity caused by fading has a strong correlation with the change in the position of peak values in the received signal when chip phase is changed by degrees.

**[0039]** Fig. 9 shows the relation between the amount of shift in chip phase (time interval  $t$ ) and the received power after despread-  
ing for a case in which the chip phase of the PN code used in despread-  
ing is shifted by degrees. Radiowaves that arrive from the transmitting station after passing over different propagation paths have mutually differing arrival times, and therefore exhibit peaks in the received power for different chip phases. Three peaks, peak #1 peak #2 and peak #3, are shown in the example shown in the figure, and the intervals between these peaks correspond to the differences in arrival times.

**[0040]** If the mobile terminal moves at a high rate of speed, peak #1, peak #2, and peak #3 also fluctuate greatly in time, and arrived radiowave search circuit 103 must therefore constantly search for these peaks over the entire conceivable range of change in chip phase. The arrow labeled "constant search" in the figure shows the search range when the mobile terminal is moving at high speed. If the mobile terminal is moving at a low rate of speed, however, the change over time is small, and arrived radiowave search circuit 103 therefore need only search for timings in the small time ranges in the vicinities of timings (arrival times) that were previously searched, and may carry out searches with interspersed time gaps. The arrows labeled "search ranges during low-speed movement" in the figure indicate ranges that should be searched when the mobile terminal is moving at a low speed, i.e., indicate vicinities of arrival times that were previously found for each propa-

gation path. Accordingly, arrived radiowave search circuit 103 can be operated intermittently instead of being operated constantly. Furthermore, although delay profiles are stored inside dual-port RAM 134 in arrived radiowave search circuit 103, the limitation of the ranges of the peak search at times of low-speed movement results in a reduction in both the amount of data that are taken as objects of comparison in dual-port RAM 134 and a reduction in the calculation load for comparison, and all of these factors contribute to the reduction of power consumption.

[0041] In this receiver, high-speed movement or low-speed movement is judged based on the intensity of the received electric field intensity that is measured by electric field intensity measurement unit 112. In other words, low speed or high speed is judged by finding the fading period of a fading pitch, in which the received electric field intensity experiences large decreases at fixed intervals as shown in Fig. 8. In an urban area where many buildings are present, the presence of a large number of objects that reflect or diffract radiowaves causes the radiowaves from the transmitting station to exist as a type of standing wave, and the variety of fading becomes Rayleigh fading. As a result, the fading pitch is determined only by the speed of movement of the mobile unit and the frequency of the radiowaves employed and is not affected by the relation between the direction of movement of the mobile unit that incorporates this receiver or the direction of the transmitting station. Specifically, the fading pitch  $t$  is represented by:

$$t = c/(f \times v) \quad (1)$$

where  $v$  is the speed of movement,  $f$  is the employed frequency, and  $c$  is the velocity of light. In other words, the fading pitch  $t$  is inversely proportional to the product of the frequency of the radiowaves  $f$  and the velocity of movement  $v$ . If the reciprocal of the fading pitch is the fading frequency, the fading frequency is proportional to the product of the employed radiowave frequency  $f$  and the velocity of movement  $v$ . Since the frequency of the employed radiowaves is known, the speed of the receiver (mobile terminal) can be estimated from the fading pitch. (fading frequency). The estimated speed of movement can then be compared with a prescribed threshold value to distinguish between high-speed movement and low-speed movement. If the frequency of the employed radiowaves is fixed, the speed of movement varies in inverse proportion to the fading pitch, and the fading pitch (or the fading frequency) can be directly compared with the threshold value. In an ordinary mobile communication system, the frequency of the employed radiowaves can be assumed to be fixed with regard to frequency assignments based on radio law. In any case, arrived radiowave search circuit 103 is operated intermittently under the control from electric field intensity measurement unit 112 in the case of low-speed movement, the search for arrived radiowaves

need be performed only in the vicinities of previously searched timings (arrival times), and the average power consumption of arrived radiowave search circuit 103 can be reduced. It is known that the difference between the peaks and troughs of fading increases when the speed of movement is high, and the difference between the peaks and troughs decreases when the speed of movement is low. Fading in which troughs are particularly deep tends to occur during high-speed movement.

[0042] Fig. 10 is a flow chart for explaining the operation of this receiver.

[0043] First, in Step 11, electric field intensity measurement unit 112 calculates the electric field intensity of received radiowaves to detect the fading pitch (fading frequency), and then determines the speed of movement of the receiver from the fading pitch. Electric field intensity measurement unit 112 then determines whether the speed of movement is high or low by comparing the speed of movement with a prescribed threshold value.

[0044] If the receiver is judged to be moving at high speed in Step 11, arrived radiowave search circuit 103 is placed in a constant ON state in Step 12 and assigns reception timings to each baseband reception unit 102 in Step 13. Then, in Step 14, electric field intensity measurement unit 112 determines if the fading pitch has changed. If the fading pitch has changed, the process returns to Step 11. If there has been no change, the process returns to Step 12.

[0045] If the receiver is judged to be moving at low speed in Step 11, on the other hand, the search range of arrived radiowave search circuit 103 is made smaller in Step 15, and reception timings are assigned to each baseband reception unit 102 in Step 16. Electric field intensity measurement unit 112 then judges whether the fading pitch has changed in Step 17. If the fading pitch has changed, the process returns to Step 11. If the fading pitch has not changed, the process returns to Step 15.

[0046] These processes eliminate the need to constantly operate arrived radiowave search circuit 103, which assigns reception timings to baseband reception units 102, in the case of low-speed movement, thereby enabling a reduction in the consumption of current and, if the receiver is a portable telephone that uses a battery, allowing a lengthening of the communication time.

[0047] The setting of the threshold value that distinguishes high-speed movement from low-speed movement is next explained. In this embodiment, based on either the speed of movement of the mobile terminal that is found from the fading pitch or on the fading pitch itself, operation is switched between turning arrival time search circuit 103 ON constantly and carrying out a peak search over the entire range of conceivable delay times, or carrying out the peak search only for certain limited ranges that include the previously found peak positions. The threshold value for this switching, i.e., the threshold value for determining low-speed movement or

high-speed movement, should be determined by considering the potential for substantial problems arising from a peak search that is carried out only in limited ranges. Fig. 11 is a view for explaining the principles for setting threshold value, and shows the relation between fading and search range. Here, a case is considered in which communication is performed using a frequency of 2 GHz.

**[0048]** If the speed of movement of the mobile terminal is assumed to be 60 km/h (16.7 m/s), equation (1) gives a fading pitch of 9 msec (a fading frequency of 111.1 Hz). In other words, the received electric field intensity rises and falls at a period of 9 msec, as shown in the figure. Further, the lines labeled A, B, ..., G in the figure show the time ranges of executing a process of calculating power by multiplying received waves in 10-msec units with the PN code. Since an integrating process accompanies the peak search, the time the calculation continues is on the order of milliseconds. A, B, ..., G correspond to the different peak positions in the delay profile, each being shifted from the others within a range of approximately  $\pm 30 \mu\text{sec}$ .

**[0049]** When the receiver is moving at a speed of 60 km/h, the electric field fluctuates greatly during the 10-msec search period, as shown in the figure, making it necessary to calculate peak positions one after another every 10 msec. If the speed of movement then becomes 20 km/h, however, the fading pitch becomes approximately 27 msec, in which a trough in the received field due to fading appears every 27 msec, thereby allowing operation in which calculation is suspended for 10 msec after a calculation of 10 msec. It is possible to set the threshold value by deciding how much time calculation is to be suspended, and then setting the threshold value as the speed of movement that enables this intermittent calculation. It is also possible to cause operation for 10 msec and suspension of operation for 20 msec when the speed of movement is approximately 10 km/h.

**[0050]** In the foregoing explanation, the speed of movement was found by measuring the fading pitch in the received electric field, but in the present invention, the speed of movement can be found from measurements other than the fading pitch, and as a minimum, it is only necessary that high-speed movement be distinguished from low-speed movement. Various methods that can be applied in the present invention for finding the speed of movement from measurements of received electric field are next explained.

**[0051]** Fig. 12 shows an actual example of the change in received electric field intensity in a mobile terminal. In this case, the value of received electric field intensity is measured at predetermined time intervals such as 5-msec intervals, and the amount of fluctuation is calculated as the difference between the successively measured values, i.e., "a" in Fig. 12. The speed of movement can be estimated from this fluctuation amount. Of course, an amount that is not the received

electric field intensity itself but that corresponds with the received electric field intensity may be measured. The relation between the amount of fluctuation in the received electric field intensity and the speed of movement may be found in advance. Since a change in the speed of the mobile terminal of several km/h within a time range of, for example, several tens of msec is normally inconceivable, the speed may be taken as the highest value among calculated values of the speed of movement that are obtained from the amount of fluctuation in the received electric field intensity within a predetermined time period.

**[0052]** Alternatively, high-speed movement can be determined if, in a comparison of size of the amount of fluctuation in the received electric field intensity and a prescribed value, the amount of fluctuation is greater; and low-speed movement can be directly determined if the prescribed value is greater. A variety of values are conceivable as the amount of fluctuation, but the use of a fluctuation value that increases with increase in the speed of movement is assumed. As a result, the use of the fading pitch itself is not appropriate, and the reciprocal of fading pitch, i.e., the fading frequency, should be used as the amount of fluctuation. In order to mitigate errors in the determination of speed in this case, the speed may be determined by integrating fluctuation amounts in the received electric field intensity a prescribed number of times or for a prescribed time interval. According to this integrating method, the integrated value increases if one of several measured amounts of fluctuation in received electric field intensity is large, i.e., if the trough of fading is deep.

**[0053]** In addition, it can be determined that the mobile terminal is moving at a high rate of speed if even one of a plurality of determined values obtained from the amount of fluctuation in received electric field intensity within a prescribed time period indicates that the receiver is moving at a high rate of speed.

**[0054]** Finally, the speed of movement of the mobile terminal can be determined by measuring the time that fading is at a peak or at a trough. In Fig. 12, for example, the time interval ( $t_1$ ) that received electric field intensity value falls below a prescribed value and the time interval ( $t_2$ ) that the received electric field intensity exceeds the prescribed value are measured, or the time period of fluctuation in the value of received electric field intensity ( $t_1 + t_2$ ) is measured, and the speed of movement of the mobile terminal is estimated from  $t_1$  and  $t_2$ , or from  $t_1 + t_2$ . In this case,  $t_1$  and  $t_2$ , or  $t_1 + t_2$  are compared with a prescribed value, and it can be determined that the mobile terminal is moving at high speed if the period of fluctuation in received electric field intensity is shorter than a prescribed value. Finally, high-speed movement can be determined if at least one of a plurality of judged values obtained from the period of fluctuation in received electric field intensity within a prescribed time interval corresponds to high-speed movement.

**[0055]** In any case, in the present invention, the



range of the peak search is modified after determining whether the mobile terminal is moving at high speed or low speed based on the amount of fluctuation in the received electric field. Various factors can be considered as the amount of fluctuation referred to here, but these include at least one of the fading pitch and the depth of the trough of fading. Further, although described as a determination of high-speed movement or low-speed movement, it is not essential that the speed of the mobile terminal be found as a numerical value. The desired effect can be obtained by a determination that is realized by directly setting the threshold value to, for example, the fading pitch or the depth of the trough of fading.

**[0056]** A hysteresis characteristic may also be added to the threshold value in the present invention. The addition of a hysteresis characteristic can prevent switching at an excessive frequency between a search of the entire search range and a partial search of a delay profile in cases in which the speed of the mobile terminal fluctuates within a range of speed close to the threshold value. Fig. 13 is a graph for explaining a case in which a hysteresis is provided. To switch between a mode in which a search is performed only in the vicinity of peaks that were previously found, i.e., the mode during low-speed movement, and a mode in which a search is performed over the entire range, i.e., the mode during high-speed movement, two threshold values T1 and T2 (where  $T1 > T2$ ) are set to the speed of the mobile unit such that switching from the mode during low-speed movement to the mode during high-speed movement occurs at threshold value T1 and switching from the mode during high-speed movement to the mode during low-speed movement occurs at the threshold value T2.

**[0057]** In the above-described embodiment, the range in which a peak search is performed switches between two levels, one in which a search is performed over the entire range and another in which a search is performed only in the vicinities of previously found peaks, but the present invention also allows switching among three or more levels. In a case of switching between three levels, the speed of the mobile unit is divided into the three levels of high speed, intermediate speed, and low speed instead of the two levels of high speed and low speed; and searching is accordingly performed across the entire range for high-speed movement but only in the vicinities of previously found peaks for intermediate-speed movement and low-speed movement. If intermediate-speed movement and low-speed movement are compared in this case, the ranges of peak search for the intermediate speed are relatively wide, while the ranges of peak search for the low speed are relatively narrow. Fig. 14 is a graph for explaining a case in which the ranges of a peak search are changed according to the three levels of high speed, intermediate speed, and low speed; and the threshold value is given a hysteresis characteristic to demarcate each of the modes of high speed, intermediate speed, and low

speed. Regarding the speed of the mobile unit, the threshold values for judging high speed and intermediate speed are made T1 and T2, and the threshold values for judging intermediate speed and low speed are made T3 and T4, where  $T1 > T2 > T3 > T4$ . Thus, switching from the mode for intermediate-speed movement to the mode for high-speed movement occurs at threshold value T1, switching from the mode for high-speed movement to the mode for intermediate-speed movement occurs at threshold value T2, switching from the mode for low-speed movement to the mode for intermediate-speed movement occurs at threshold value T3, and switching from the mode for intermediate-speed movement to the mode for low-speed movement occurs at threshold value T4.

**[0058]** Fig. 15 is a view showing the relation between the range of peak search and the positions of peaks in delay profiles when the speed of the mobile unit is divided between high speed, intermediate speed, and low speed. The relation between the mode for high-speed movement and the mode for intermediate-speed movement is equivalent to the relation between the mode for high-speed movement and the mode for low-speed movement in the case of the two-level switching shown in Fig. 9. In the case shown in Fig. 15, on the other hand, regarding the relation between the mode for intermediate-speed movement and the mode for low-speed movement with respect to the ranges of delay times for which a peak search is performed, searches are performed over relatively broad ranges that center on previously found peaks in the mode for intermediate-speed movement, while searches in the mode for low-speed movement are performed over relatively narrow ranges that center on previously found peaks. The power consumption of the arrived radiowave search circuit can be greatly reduced by making the range of the peak search extremely narrow in cases in which the mobile terminal is moving at an extremely low speed that is equal to or slower than the speed of walking, including cases in which the mobile terminal is stationary.

**[0059]** In the above-described examples, the speed of the mobile terminal was divided between the two levels of high-speed/low-speed or the three levels of high-speed/intermediate-speed/low-speed, but the speed of the mobile terminal may also be divided between movement and substantially no movement, i.e., standing still. In more concrete terms, it may first be determined whether fading itself has been observed substantially or not, fading being judged as absent if fading is substantially unobserved, i.e., if the received field is substantially uniform. In cases of no fading, the range of the peak search may be made extremely narrow, and in cases in which fading occurs or in which fading is observed, the peak search may be performed across the entire range. Dividing the speed of the mobile terminal in this way is effective for greatly reducing power consumption in a mobile terminal such as a mobile ter-



terminal that is installed on a railway car, in which case the mobile terminal spends most of the time either stopped in a station or a car shed or moving at a speed of several tens of kilometers per hour or more, and almost no time at a low-speed range of less than 20 kilometers per hour.

**[0060]** Another embodiment of the present invention is next described. Actual portable telephones use a special channel referred to as a "perch channel" for capturing or transferring control signals, and are often equipped with two antenna systems: a built-in antenna and a whip antenna that is extracted from the case during use (during communication). Since the whip antenna cannot be used when not communicating, the built-in antenna is provided for receiving, for example, control signals that include a call termination signal. In this embodiment, a receiver is described that both uses a perch channel and is provided with two antennas, a built-in antenna and a whip antenna. Fig. 16 is a block diagram showing the construction of this type of receiver.

**[0061]** Perch receiver 142, which is independent of RAKE receiver 141 for performing RAKE reception, is provided for receiving a perch channel. Built-in antenna 143 is connected to first reception radio-frequency unit 145 that amplifies and frequency-converts radio-frequency received signals that are received by built-in antenna 143 to convert to baseband received signals. The received signals from first reception radio-frequency unit 145 are not only applied to RAKE receiver 141 and perch receiver 142, but also applied to arrived radiowave search circuit 149, to be explained hereinbelow. On the other hand, whip antenna 144 is connected to transmission/reception filter 146 for separating transmission signals and received signals, and the receiving-side port of transmission/reception filter 221 is connected to second reception radio-frequency unit 147, which amplifies and frequency-converts radio-frequency received signals that are received at whip antenna 144 to convert to baseband received signals. Received signals from second reception radio-frequency unit 147 are applied to RAKE receiver 141, perch receiver 142, and arrived radiowave search circuit 149.

**[0062]** RAKE receiver 141 is provided with: a plurality of baseband reception units 161 that receive in parallel baseband received signals from reception radio-frequency units 145 and 147 and perform despreading of the received signals by a prescribed PN code; RAKE combiner 162 for performing RAKE combining of the despread signals that have been outputted from each of baseband reception units 161; and Viterbi decoder 163 for performing Viterbi decoding of the signals after combining. The output of Viterbi decoder 163 is the output of RAKE receiver 141, and this output is converted to speech signals by reception speech processor 151 that decodes to speech signals, and the speech signals following conversion are then outputted from ear receiver

152. In the example shown in the figure, six baseband reception units 161 are provided.

**[0063]** Perch receiver 164 is provided with: perch correlator 164 for receiving baseband received signals from reception radio-frequency units 145 and 147, performing despreading of the received signals by a prescribed PN code, and detecting perch channel signals; perch processor 165 for carrying out signal processing of detected perch channel signals; and Viterbi decoder 166 for carrying out Viterbi decoding of signals following signal processing.

**[0064]** Arrived radiowave search circuit 149 performs a search of arrived radiowaves by detecting peaks of each of the propagation components for which delay times differ for performing RAKE combining, and reports a timing for despreading to each baseband reception unit 161 in RAKE receiver 141 and perch correlator 164 in perch receiver 164. The internal construction of arrived radiowave search circuit 149 is the same as shown in Fig. 7. Information relating to the speed of the mobile unit that incorporates this receiver, however, is not provided from an electric field intensity measurement unit, but from control circuit 150, to be described hereinbelow. Based on the information relating to the speed of the mobile unit, arrived radiowave search circuit 149 switches between setting the range of the peak search to the entire range of conceivable delay times or to a limited range in the vicinities of the already found peaks.

**[0065]** This receiver is also provided with: control circuit 150 for controlling the entire receiver; and a transmission unit that is made up of microphone 153 for converting input speech to electrical signals (speech signals), transmission speech processor 154 for encoding speech signals that are outputted from microphone 153, baseband transmission processor 155 for spread-modulating the encoded signals by a prescribed PN code and converting to baseband transmission signals, and transmission radio-frequency unit 148 for converting the baseband transmission signals to radio-frequency transmission signals. The output of transmission radio-frequency unit 148, i.e., radio-frequency transmission signals, is applied to the transmission-side port of transmission/reception filter 146.

**[0066]** Control circuit 150 in this receiver also takes as input the received electric field intensity values from RAKE receiver 141 after RAKE combining, and the code output and received electric field intensity values of the perch channel from Viterbi decoder 163 in perch receiver 142. Based on these received electric field intensity values, control circuit 150 calculates the speed of the mobile unit that incorporates this receiver from, for example, fading pitch, judges between high-speed movement or low-speed movement, and outputs the result of this judgment to arrived radiowave search circuit 149. In other words, control circuit 150 has the functions of electric field intensity measurement unit 112 (see Fig. 6) in the previously-described basic embodi-

ment.

[0067] The operation of this receiver is next described with reference to the flow chart of Fig. 17.

[0068] First, the capture operation of the perch channel is carried out in Step 21 when the receiver power is turned ON, and synchronization is established in Step 22. Operations for a call origination or a call termination begin in Step 23, and the expected reception is carried out as necessary in Step 24. Telephone communication then begins in Step 25, and low-current consumption operation begins in Step 26. It is then judged in Step 27 whether the clearing operation applies. Processing ends if the clearing operation applies, but if not, processing moves on as shown in the flow chart of Fig. 10, and communication continues with the search range of arrived radiowaves changing according to the speed of the mobile unit.

[0069] In the case of low-speed movement in the receiver of this embodiment, there is no need to constantly operate arrived radiowave search circuit 149, which assigns reception timings to baseband processor 161 and perch receiver 142, whereby the consumption of current can be reduced and, if the receiver is a portable telephone that uses a battery, the possible talk time can be lengthened.

#### Industrial Applicability:

[0070] According to the present invention, when low-speed movement is determined by observing the received electric field intensity to find the fading pitch and then estimating the speed of movement of the mobile terminal from the fading pitch, the arrived radiowave search circuit can be operated intermittently and searches of arrived radiowaves can be performed only in the vicinities of previously searched timings (arrival times), thereby allowing a reduction in the power consumption of the entire mobile terminal and an extension in the possible talk time.

#### Claims

1. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception method comprising the steps of:

detecting reception state of the received signals; and  
changing a range of delay time in which a search of said arrived radiowaves is performed when said reception state satisfies a prescribed condition.

2. A CDMA reception method according to claim 1, wherein said prescribed condition is absence of fading.

3. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception method comprising the steps of:

detecting an amount of fluctuation in received electric field of the received signals; and  
changing a range of delay time in which a search of said arrived radiowaves is performed when said amount of fluctuation satisfies a prescribed condition.

4. A CDMA reception method according to claim 3, wherein said prescribed condition is absence of fading.

5. A CDMA reception method according to claim 3, wherein said amount of fluctuation is at least one of fading pitch and depth of fading.

6. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; wherein said CDMA reception method comprising the steps of:

detecting an amount of fluctuation in received electric field of the received signals; and  
switching a range of delayed time in which a search of said arrived radiowaves is performed among a plurality of levels according to said amount of fluctuation.

7. A CDMA reception method according to claim 6, wherein a range of delay time in which a search of said radiowaves is performed at a level of said plurality of levels that accords with an amount of fluctuation that corresponds to a relatively high speed of movement of said mobile terminal is greater than a range of delay time in which a search of said radiowaves is performed at a level that accords with an amount of fluctuation that corresponds to a relatively low speed of movement.

8. A CDMA reception method according to claim 6,

wherein said amount of fluctuation is at least one of fading pitch and depth of fading.

9. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception method comprising the steps of:

detecting an amount of fluctuation in received electric field of the received signals;  
distinguishing whether said mobile terminal is in a relatively high-speed state or a relatively low-speed state based on said amount of fluctuation; and  
performing a search of said arrived radiowaves intermittently by performing a search of said arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths when said mobile terminal is in said relatively low-speed state.

10. A CDMA reception method according to 9, wherein said amount of fluctuation is at least one of fading pitch and depth of fading.

11. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception method comprising the steps of:

detecting an amount of fluctuation in received electric field;  
distinguishing whether said mobile terminal is in a relatively high-speed state or a relatively low-speed state based on said amount of fluctuation by comparing with a threshold value; and  
performing a search of said arrived radiowaves intermittently by performing a search of said arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths when said mobile terminal is in said relatively low-speed state.

12. A CDMA reception method according to claim 11, wherein a hysteresis characteristic is added in which a threshold value that corresponds to a transition from said state of relatively low speed of

movement to said state of relatively high speed of movement differs from a threshold value that corresponds to a transition from said state of relatively high speed of movement to said state of relatively low speed of movement.

13. A CDMA reception method according to claim 11, wherein said amount of fluctuation is at least one of fading pitch and depth of fading.

14. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception method comprising the steps of:

detecting an amount of fluctuation in received electric field of the received signals;  
distinguishing whether value of said amount of fluctuation is in a relatively large value state or a relatively small value state; and  
performing a search of said arrived radiowaves intermittently by performing a search of said arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths when the value of said amount of fluctuation is in the relatively small value state.

15. A CDMA reception method according to claim 14, wherein said amount of fluctuation is at least one of a reciprocal of fading pitch and depth of fading.

16. A Code Division Multiple Access (CDMA) reception method that is a reception method in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves to detect propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception method comprising the steps of:

detecting an amount of fluctuation in received electric field;  
comparing a value of said amount of fluctuation with a prescribed threshold value; and  
performing a search of said arrived radiowaves intermittently by performing a search of said arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths when the value of said amount of fluctuation is smaller than said threshold value.

17. A CDMA reception method according to claim 16

wherein said amount of fluctuation is at least one of a reciprocal of fading pitch and depth of fading.

18. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception circuit comprising:

baseband reception means for performing despreading of the received signals;  
electric field intensity measurement means for detecting an amount of fluctuation in received electric field of the received signals; and  
an arrived radiowave search circuit for performing a search of arrived radiowaves that detects radiowaves of propagation paths of different delay times, and assigning radiowaves of different propagation paths to respective said baseband reception means;  
wherein a range of delay time of the search of arrived radiowaves that is performed by said arrived radiowave search circuit changes when said amount of fluctuation satisfies a prescribed condition.

19. A CDMA reception circuit according to claim 18, wherein said prescribed condition is the absence of fading.

20. A CDMA reception circuit according to claim 18, wherein said arrived radiowave search circuit operates intermittently when the range of delay time of the arrived radiowave search performed by said arrived radiowave search circuit is modified to become smaller.

21. A CDMA reception circuit according to claim 18, wherein said amount of fluctuation is at least one of fading pitch and depth of fading.

22. A CDMA reception circuit according to claim 18, wherein said baseband reception means is constituted by a plurality of baseband reception units necessary for RAKE reception.

23. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception circuit comprising:

baseband reception means for performing despreading of the received signals;

electric field intensity measurement means for detecting an amount of fluctuation in received electric field of the received signals; and

an arrived radiowave search circuit for performing a search of arrived radiowaves that detects radiowaves of propagation paths of different delay times, and assigning radiowaves of different propagation paths to respective said baseband reception means;

wherein a range of delay time in which said arrived radiowave search circuit performs a search of arrived radiowaves is switched among a plurality of levels according to said amount of fluctuation such that the range of delay time in which said radiowave search is performed at the level for an amount of fluctuation that corresponds to a relatively high speed of movement of said mobile terminal is greater than the range of delay time in which said radiowave search is performed at the level for an amount of fluctuation that corresponds to a relatively low speed of movement.

24. A CDMA reception circuit according to claim 23, wherein said arrived radiowave search circuit operates intermittently when the range of delay time of the arrived radiowave search performed by said arrived radiowave search circuit is modified to become smaller.

25. A CDMA reception circuit according to claim 23, wherein said amount of fluctuation is at least one of fading pitch and depth of fading.

26. A CDMA reception circuit according to claim 23, wherein said baseband reception means is constituted by a plurality of baseband reception units necessary for RAKE reception.

27. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception circuit comprising:

baseband reception means for performing despreading of the received signals;  
electric field intensity measurement means for detecting an amount of fluctuation in received electric field of the received signals; and  
an arrived radiowave search circuit for performing a search of arrived radiowaves that detects radiowaves of propagation paths of different delay times, and assigning radiowaves of different propagation paths to respective said baseband reception means;

wherein speed of movement of said mobile terminal is estimated from a value of said amount of fluctuation, and it is distinguished whether said mobile terminal is in a state of relatively low-speed movement or in a state of relatively high-speed movement, and when in said state of relatively low-speed movement, said arrived radiowave search circuit performs said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

28. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception circuit comprising:

a plurality of baseband reception units for performing despreading of the received signals; electric field intensity measurement means for detecting an amount of fluctuation in received electric field of the received signals; and an arrived radiowave search circuit for performing a search of arrived radiowaves that detects radiowaves of propagation paths of different delay times, and assigning radiowaves of different propagation paths to respective said baseband reception units; wherein speed of movement of said mobile terminal is estimated from a value of said amount of fluctuation, said speed of movement is compared with a prescribed threshold value, and when a value of said speed of movement is smaller than said threshold value, said arrived radiowave search circuit performs said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

29. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception circuit comprising:

baseband reception means for performing despreading of the received signals; electric field intensity measurement means for detecting an amount of fluctuation in received electric field of the received signals; and an arrived radiowave search circuit for performing a search of arrived radiowaves that detects radiowaves of propagation paths of different

delay times, and assigning radiowaves of different propagation paths to respective said baseband reception means;

wherein it is distinguished whether a value of said amount of fluctuation is in a relatively high value state or a relatively low value state, and when the value of said amount of fluctuation is in said relatively low value state, said arrived radiowave search circuit performs said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

30. A CDMA reception circuit according to claim 29, wherein said arrived radiowave search circuit operates intermittently when performing said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

31. A CDMA reception circuit according to claim 29, wherein said amount of fluctuation is at least one of a reciprocal of fading pitch and depth of fading.

32. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication and uses RAKE combining to combine received signals from radiowaves of different propagation paths; said CDMA reception circuit comprising:

baseband reception means for performing despreading of the received signals; electric field intensity measurement means for detecting an amount of fluctuation in received electric field of the received signals; and an arrived radiowave search circuit for performing a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and assigning radiowaves of different propagation paths to respective said baseband reception means; wherein a value of said amount of fluctuation is compared with a prescribed threshold value, and when the value of said amount of fluctuation is smaller than said threshold value, said arrived radiowave search circuit performs said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

33. A CDMA reception circuit according to claim 32, wherein said arrived radiowave search circuit operates intermittently when performing said search of arrived radiowaves only in the vicinities of previously found arrival times for each of said propagation paths.

34. A CDMA reception circuit according to claim 32, wherein said amount of fluctuation is at least one of a reciprocal of fading pitch and depth of fading.

35. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; characterized in that

a reception state of the received signals is detected, and a range of delay time in which said search of arrived radiowaves is performed is modified when said reception state meets a prescribed condition.

36. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; characterized in that

an amount of fluctuation in received electric field of the received signals is detected, and a range of delay time in which said search of arrived radiowaves is performed is modified when said amount of fluctuation meets a prescribed condition.

37. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; characterized in that

an amount of fluctuation in received electric field of the received signals is detected, and a range of delay times in which said search of arrived radiowaves is performed is switched among a plurality of levels according to said amount of fluctuation.

38. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different

propagation paths; characterized in that

an amount of fluctuation of received electric field of the received signals is detected, it is distinguished, based on said amount of fluctuation, whether said mobile terminal is in a state of relatively high-speed movement or in a state of relatively low-speed movement, and during said state of relatively low-speed movement, said search of arrived radiowaves is performed intermittently by performing said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

39. A Code Division Multiple Access (CDMA) reception circuit that is a reception circuit in a mobile terminal that uses a spread spectrum to realize communication, performs a search of arrived radiowaves that detects radiowaves of propagation paths having different delay times, and uses RAKE combining to combine received signals from radiowaves of different propagation paths; characterized in that

an amount of fluctuation in received electric field of the received signals is detected, it is distinguished whether a value of said amount of fluctuation is in a relatively high value state or a relatively low value state, and when the value of said amount of fluctuation is in said relatively low value, said search of arrived radiowaves is performed intermittently by performing said search of arrived radiowaves only in vicinities of previously found arrival times for each of said propagation paths.

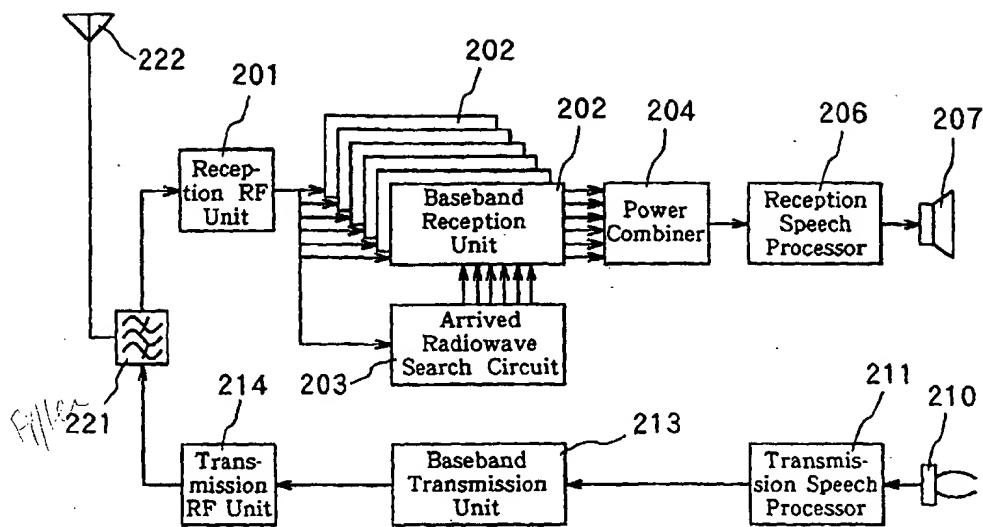


FIG. 1

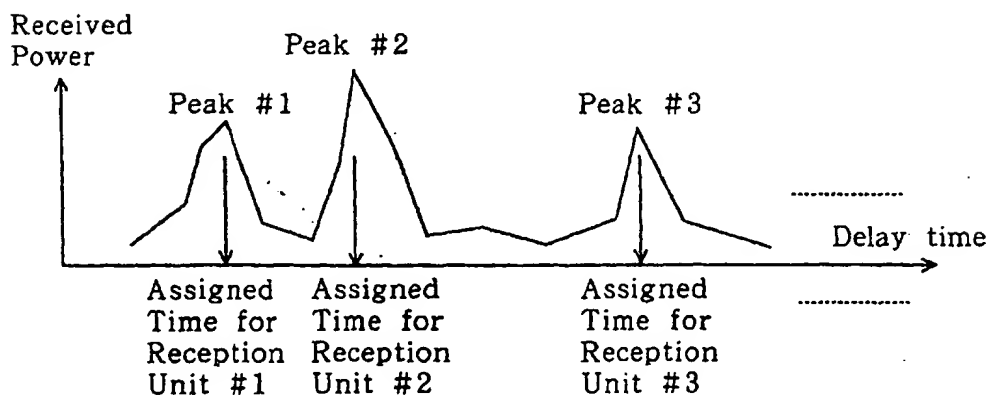


FIG. 2

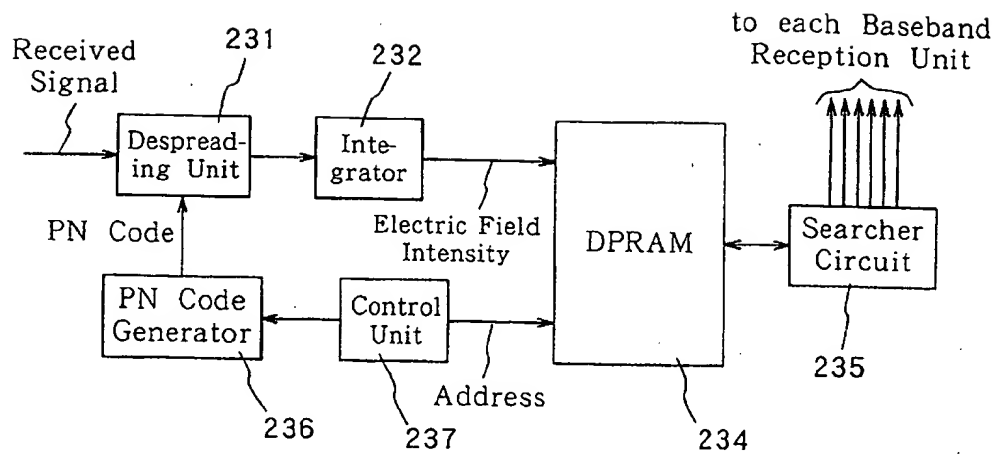


FIG. 3



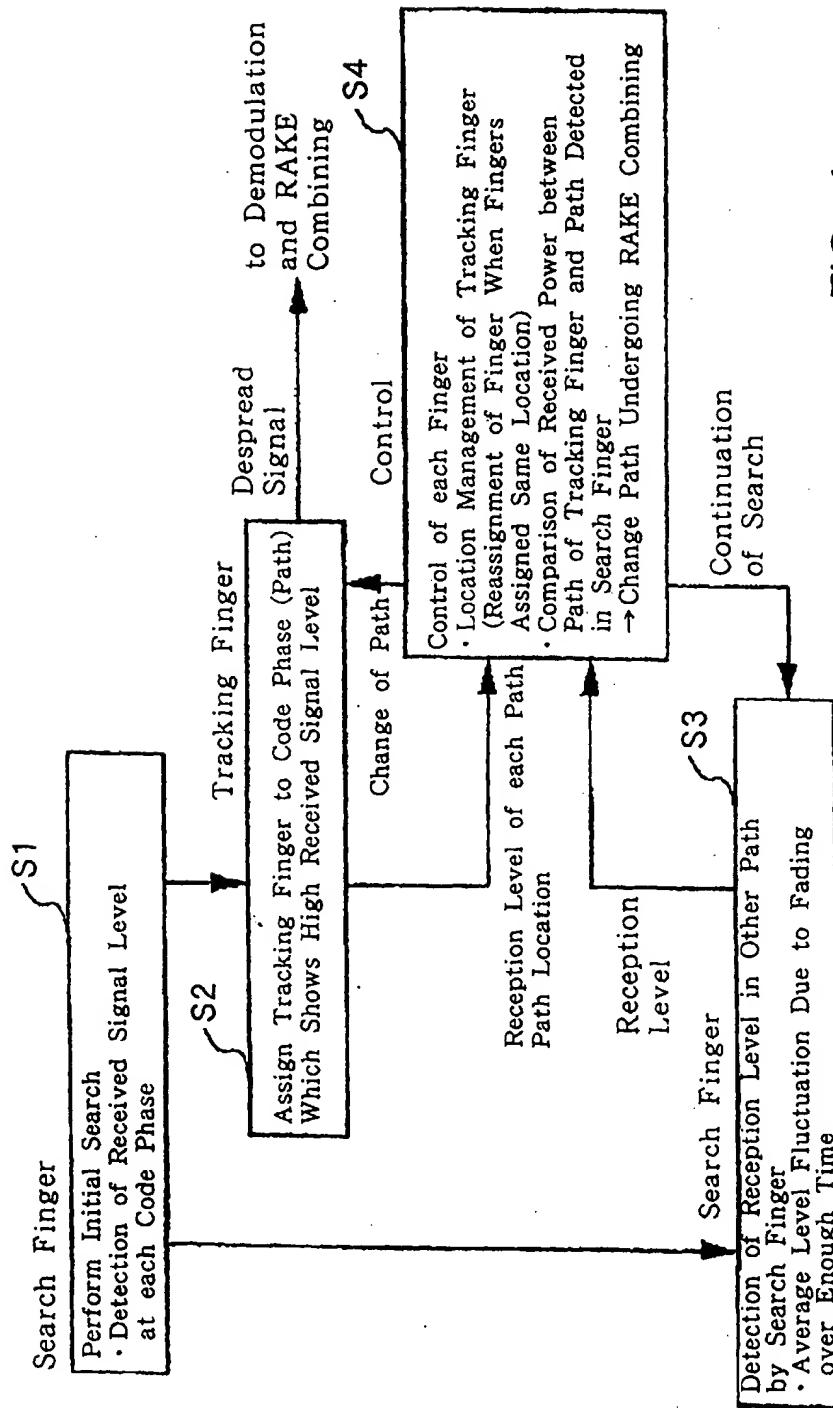


FIG. 4

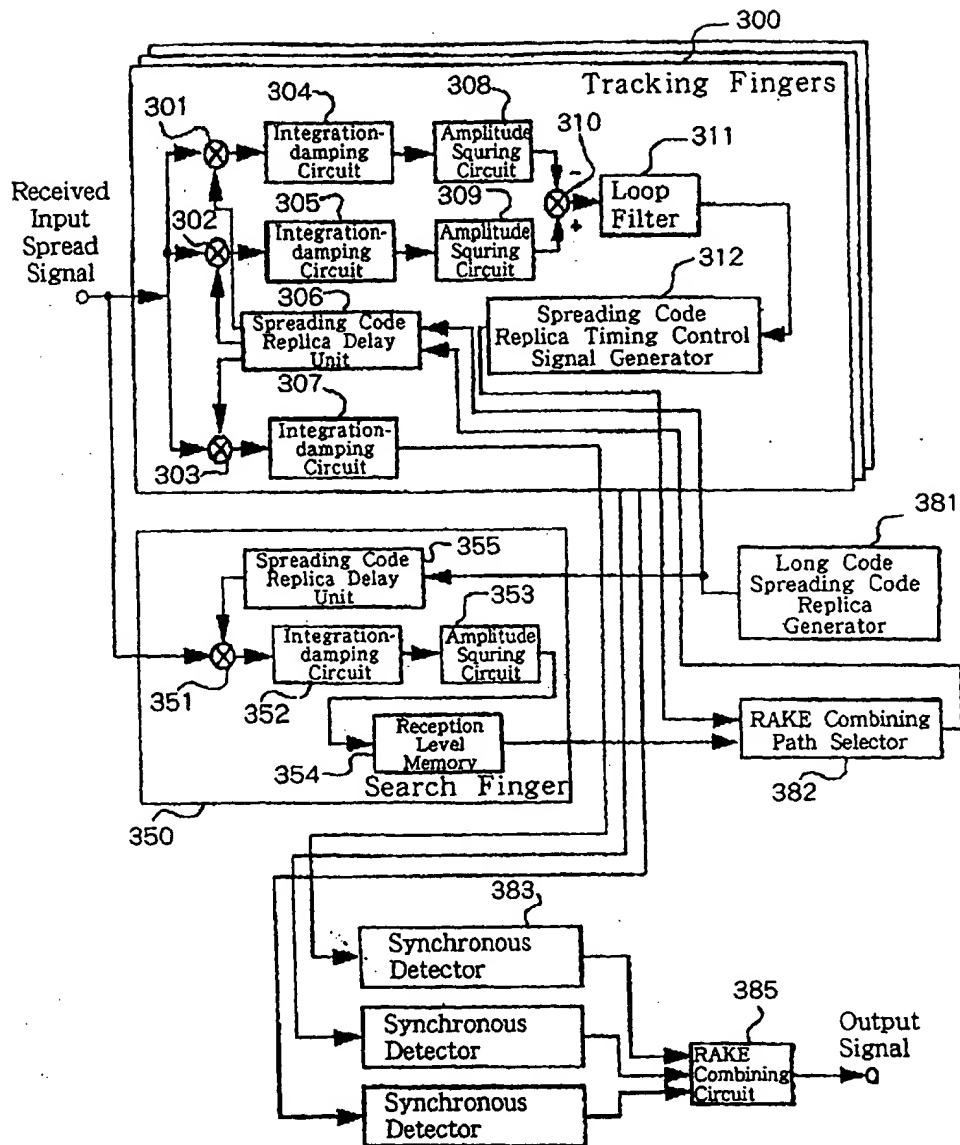


FIG. 5

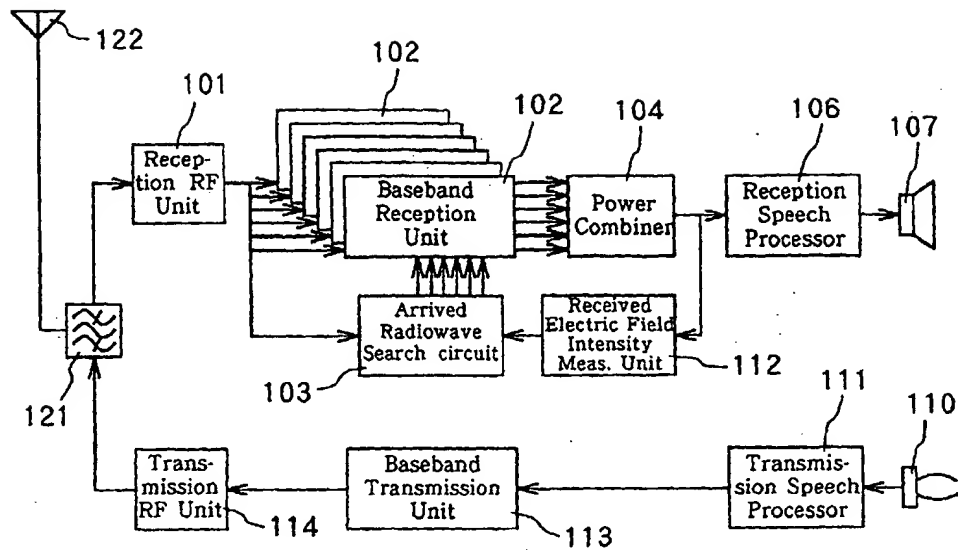


FIG. 6

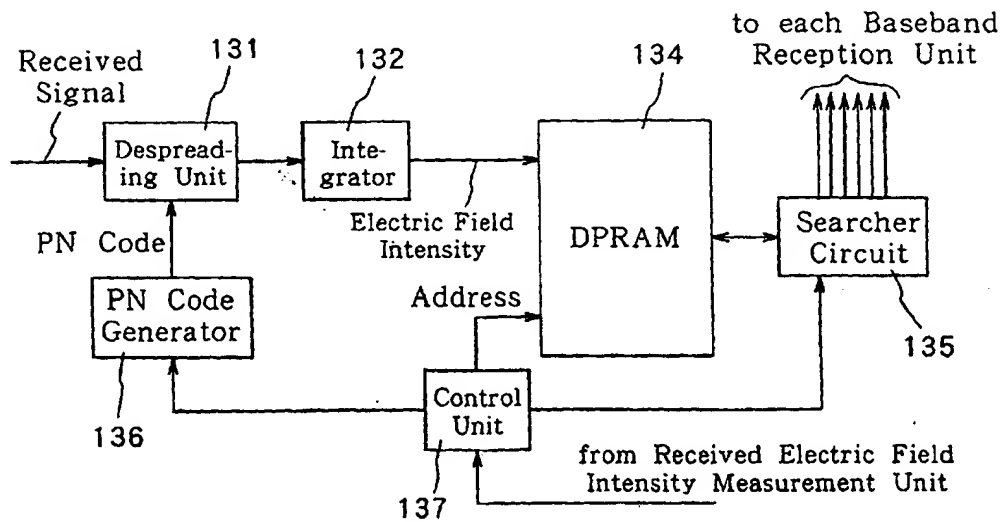


FIG. 7

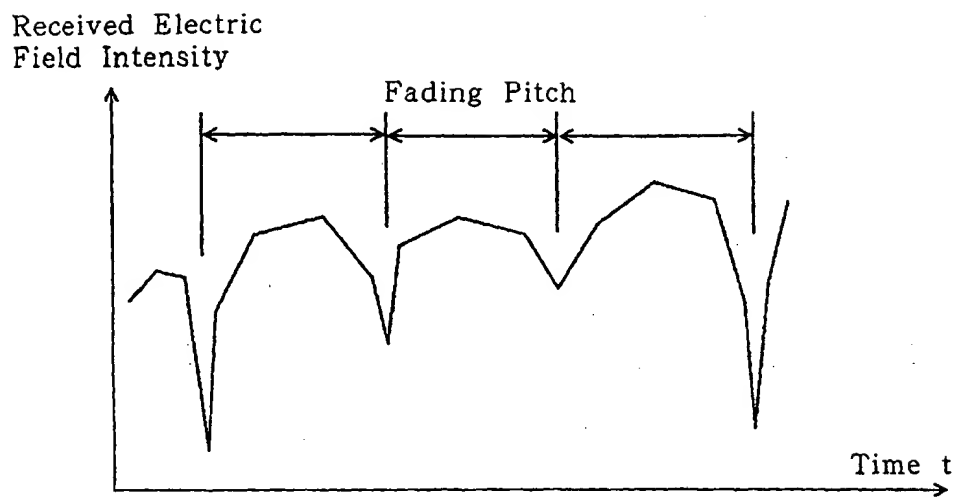


FIG. 8

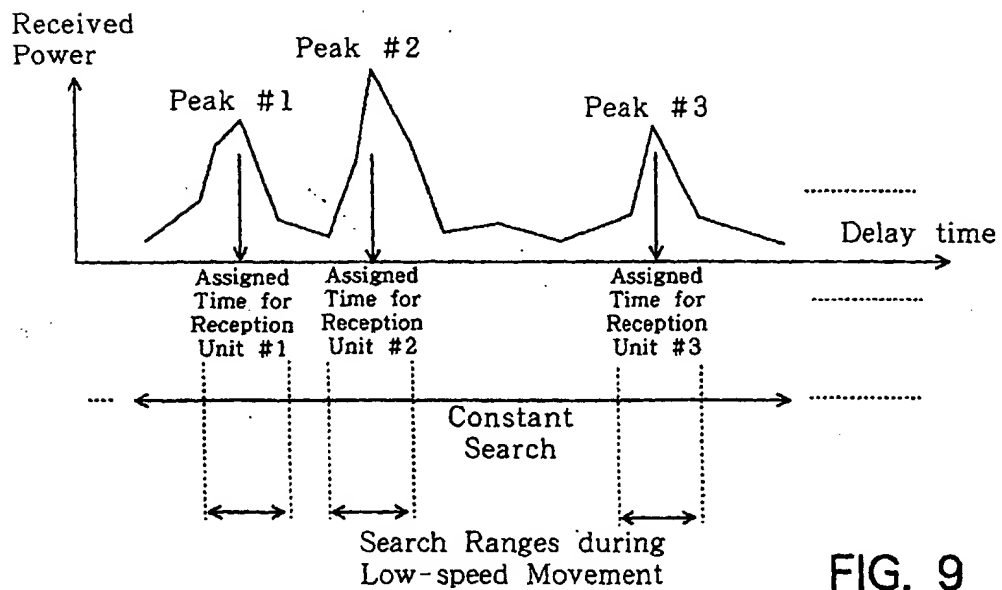


FIG. 9

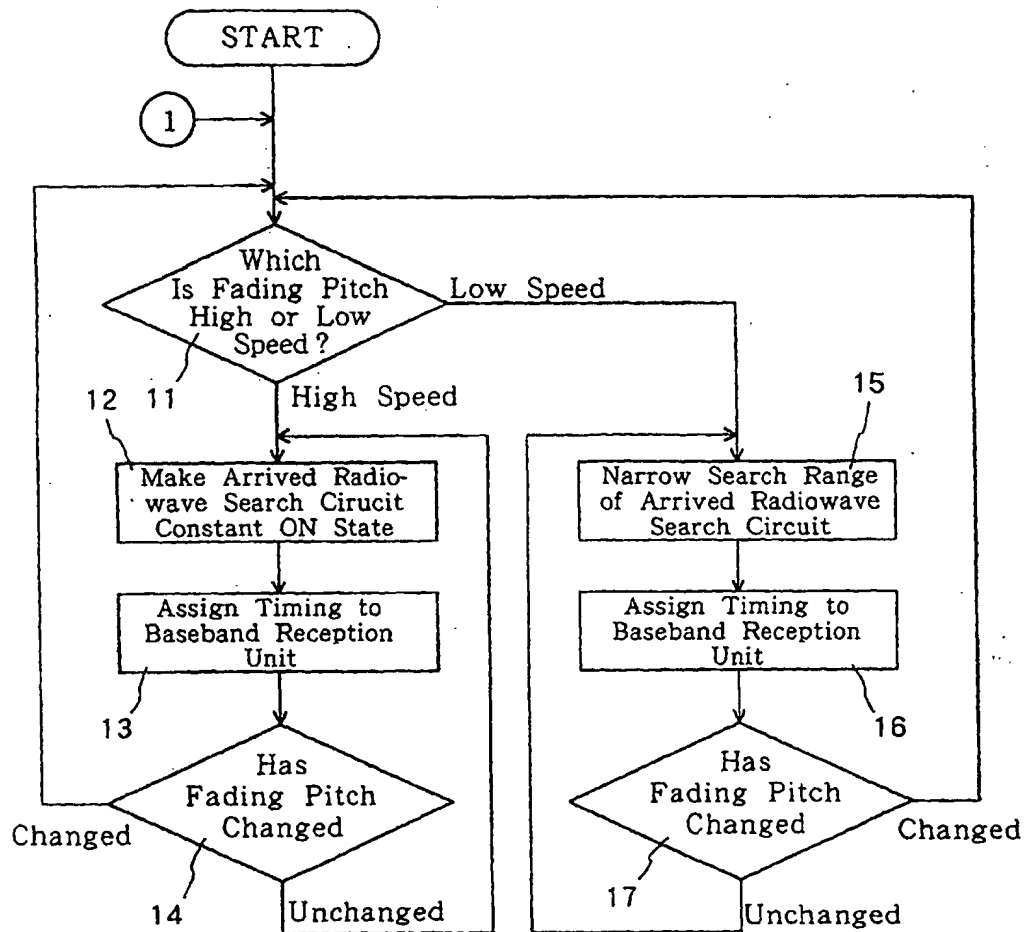


FIG. 10

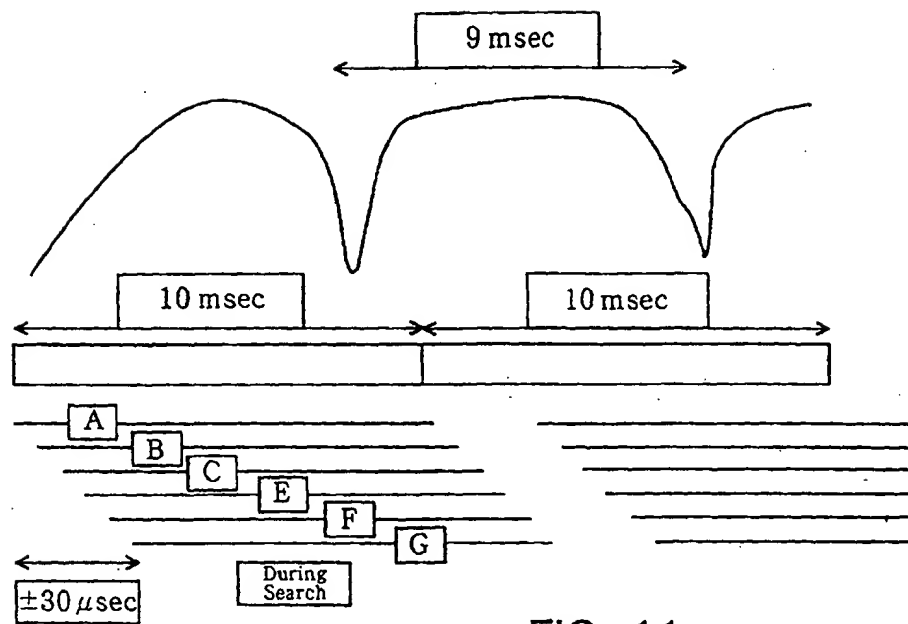


FIG. 11

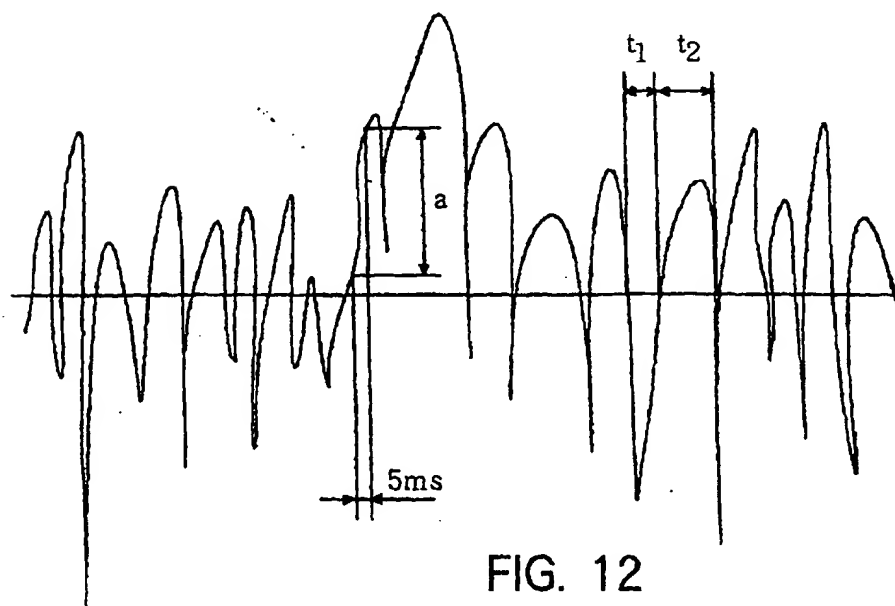


FIG. 12

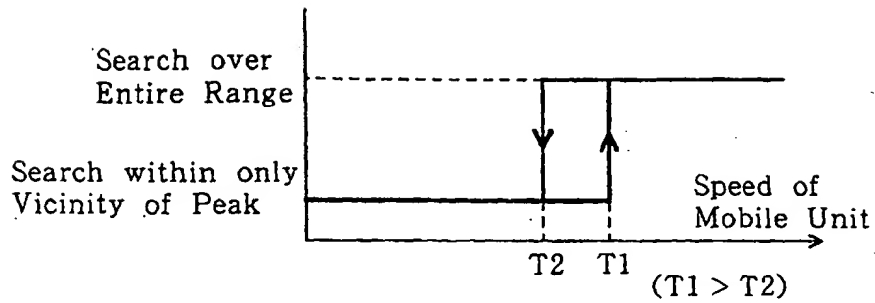


FIG. 13

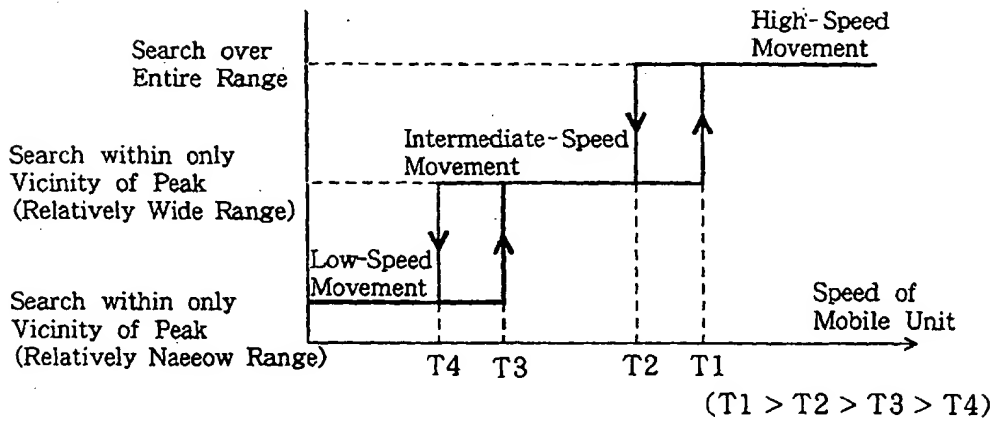


FIG. 14

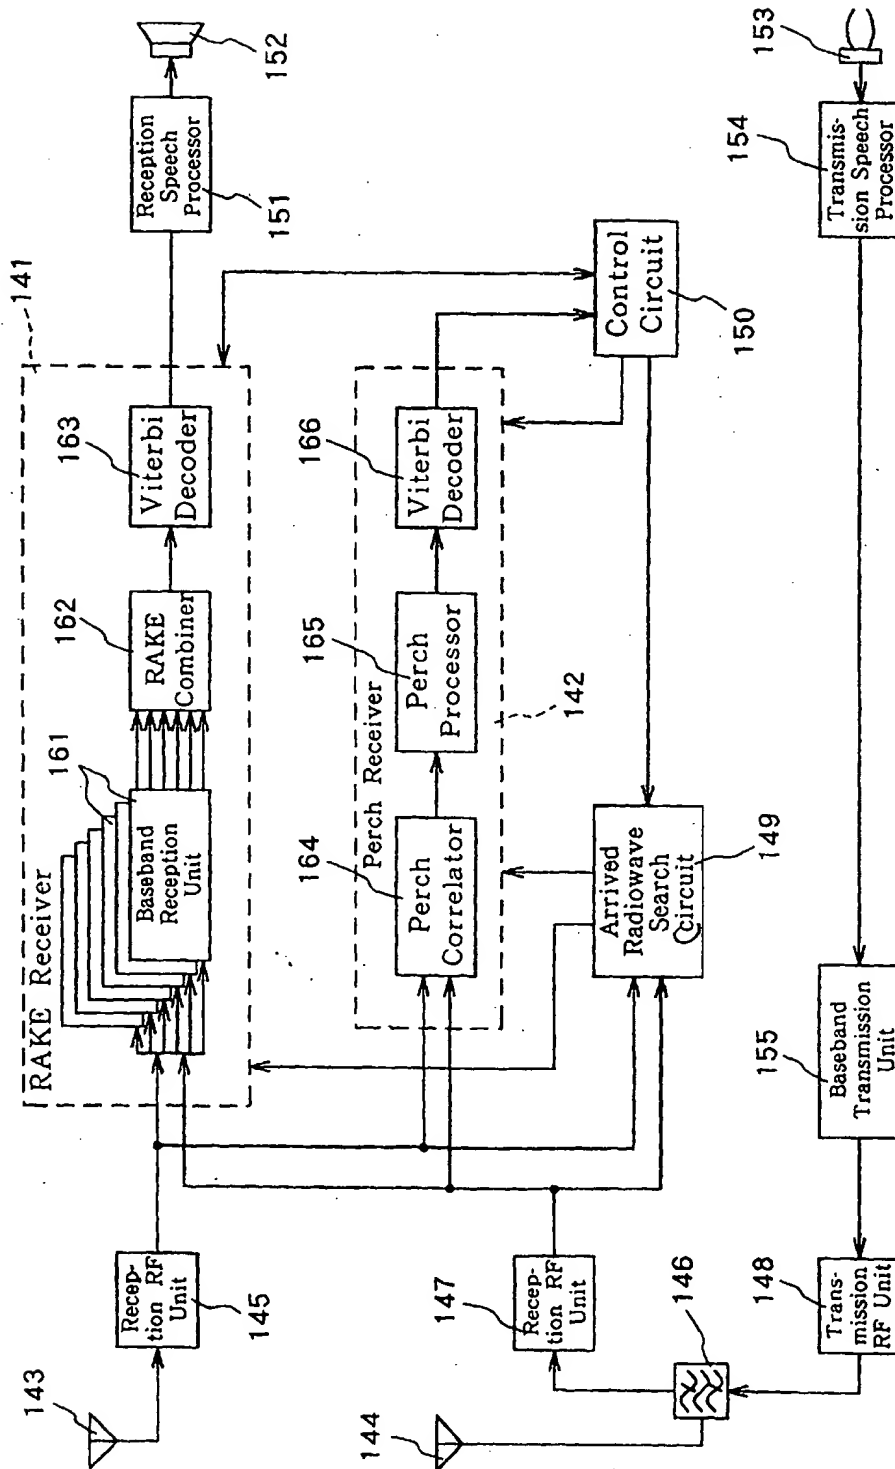


FIG. 16